





LED DRIVER 電源驅動器

OPEN FRAME SERIES LED DRIVER (CUSTOMIZED) 内置式板系列 (可定制)

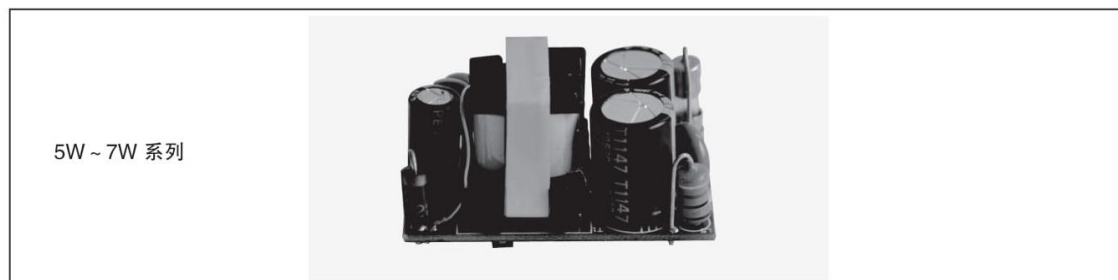


Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL5-18-C0A30	90 ~ 264Vac	16V	15 ~ 18V	300mA	80	0.5	37*21*20
ETL5-18-C0A35	90 ~ 264Vac	16V	15 ~ 18V	350mA	80	0.5	37*21*20
ETL5-36-C0A15	90 ~ 264Vac	33V	30 ~ 36V	150mA	80	0.5	37*21*20
ETL7-24-C0A30	90 ~ 264Vac	22V	20 ~ 24V	300mA	80	0.5	37*21*20
ETL7-24-C0A35	90 ~ 264Vac	22V	20 ~ 24V	350mA	80	0.5	37*21*20
ETL7-48-C0A15	90 ~ 264Vac	46V	44 ~ 48V	150mA	80	0.5	37*21*20

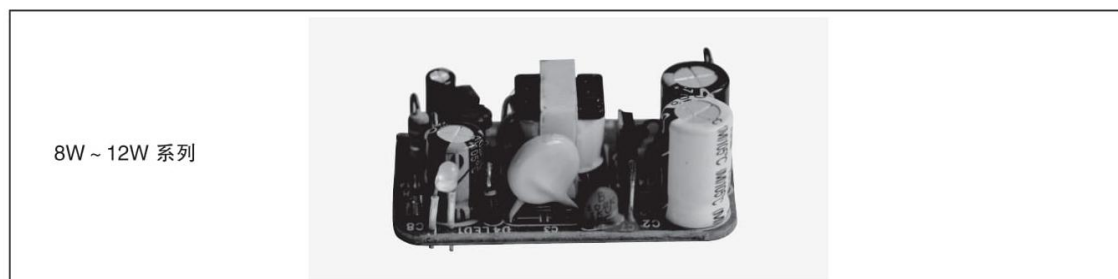

Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL8-42-C0A20	90 ~ 130Vac	40V	30 ~ 45V	200mA	85	0.8	60*23*20
ETL8-60-C0A15	90 ~ 130Vac	55V	50 ~ 65V	150mA	85	0.8	60*23*20
ETL8-42-C0A20	180 ~ 264Vac	40V	30 ~ 45V	200mA	85	0.8	60*23*20
ETL8-60-C0A15	180 ~ 264Vac	55V	50 ~ 65V	150mA	85	0.8	60*23*20
ETL10-33-C0A30	90 ~ 130Vac	33V	30 ~ 40V	300mA	85	0.8	60*23*20
ETL10-50-C0A20	90 ~ 130Vac	50V	45 ~ 55V	200mA	85	0.8	60*23*20
ETL10-65-C0A15	90 ~ 130Vac	65V	55 ~ 70V	150mA	85	0.8	60*23*20
ETL10-33-C0A30	180 ~ 264Vac	33V	30 ~ 40V	300mA	85	0.8	60*23*20
ETL10-50-C0A20	180 ~ 264Vac	50V	45 ~ 55V	200mA	85	0.8	60*23*20
ETL10-65-C0A15	180 ~ 264Vac	65V	55 ~ 70V	150mA	85	0.8	60*23*20
ETL12-24-C0A50	90 ~ 130Vac	24V	20 ~ 30V	500mA	85	0.8	60*23*20
ETL12-40-C0A30	90 ~ 130Vac	40V	35 ~ 45V	300mA	85	0.8	60*23*20
ETL12-24-C0A50	180 ~ 264Vac	24V	20 ~ 30V	500mA	85	0.8	60*23*20
ETL12-40-C0A30	180 ~ 264Vac	40V	35 ~ 45V	300mA	85	0.8	60*23*20


LED DRIVER 電源驅動器
INDOOR SERIES 室內有殼系列

5W ~ 7W 系列



Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL5-18-C0A30	90 ~ 264Vac	16V	15 ~ 18V	300mA	80	0.5	66*32*24
ETL5-18-C0A35	90 ~ 264Vac	16V	15 ~ 18V	350mA	80	0.5	66*32*24
ETL5-36-C0A15	90 ~ 264Vac	33V	30 ~ 36V	150mA	80	0.5	66*32*24
ETL7-24-C0A30	90 ~ 264Vac	22V	20 ~ 24V	300mA	80	0.5	66*32*24
ETL7-24-C0A35	90 ~ 264Vac	22V	20 ~ 24V	350mA	80	0.5	66*32*24
ETL7-48-C0A15	90 ~ 264Vac	46V	44 ~ 48V	150mA	80	0.5	66*32*24

8W ~ 10W 系列




Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL8-28-C0A35	90 ~ 130 Vac	23V	20 ~ 28V	350mA	81	0.8	73*36*23
ETL8-28-C0A30	90 ~ 130 Vac	26V	20 ~ 28V	300mA	81	0.8	73*36*23
ETL8-60-C0A15	90 ~ 130 Vac	55V	50 ~ 65V	150mA	81	0.8	73*36*23
ETL8-28-C0A35	180 ~ 264 Vac	23V	20 ~ 28V	350mA	81	0.8	73*36*23
ETL8-28-C0A30	180 ~ 264 Vac	26V	20 ~ 28V	300mA	81	0.8	73*36*23
ETL8-60-C0A15	180 ~ 264 Vac	55V	50 ~ 65V	150mA	81	0.8	73*36*23
ETL10-30-C0A35	90 ~ 130 Vac	29V	25 ~ 35V	350mA	81	0.8	73*36*23
ETL10-33-C0A30	90 ~ 130 Vac	33V	30 ~ 40V	300mA	81	0.8	73*36*23
ETL10-50-C0A20	90 ~ 130 Vac	50V	45 ~ 55V	200mA	81	0.8	73*36*23
ETL10-30-C0A35	180 ~ 264 Vac	29V	25 ~ 35V	350mA	81	0.8	73*36*23
ETL10-33-C0A30	180 ~ 264 Vac	33V	30 ~ 40V	300mA	81	0.8	73*36*23
ETL10-50-C0A20	180 ~ 264 Vac	50V	45 ~ 55V	200mA	81	0.8	73*36*23



LED DRIVER 電源驅動器


INDOOR SERIES 室內有殼系列

10W ~ 15W 系列




Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL10-30-C0A35	90 ~ 264Vac	29V	25~35V	350mA	81	0.9	110*35*22
ETL10-33-C0A30	90 ~ 264Vac	33V	30~40V	300mA	81	0.9	110*35*22
ETL10-50-C0A20	90 ~ 264Vac	50V	45~55V	200mA	81	0.9	110*35*22
ETL15-22-C0A70	90 ~ 264Vac	22V	20~30V	700mA	81	0.9	110*35*22
ETL15-25-C0A60	90 ~ 264Vac	25V	20~30V	600mA	81	0.9	110*35*22
ETL15-42-C0A35	90 ~ 264Vac	42V	35~45V	350mA	81	0.9	110*35*22
ETL15-50-C0A30	90 ~ 264Vac	50V	45~55V	300mA	81	0.9	110*35*22

20W 系列



Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL20-20-C1A0	90 ~ 264Vac	20V	15 ~ 25V	1000mA	85	0.9	130*30*25
ETL20-24-C0A80	90 ~ 264Vac	24V	20 ~ 30V	800mA	85	0.9	130*30*25
ETL20-28-C0A70	90 ~ 264Vac	28V	20 ~ 30V	700mA	85	0.9	130*30*25
ETL20-33-C0A60	90 ~ 264Vac	33V	30 ~ 40V	600mA	85	0.9	130*30*25

25W 系列






Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL25-20-C1A20	90 ~ 264Vac	20V	15 ~ 25V	1200mA	85	0.95	130*40*30
ETL25-36-C0A70	90 ~ 264Vac	36V	30 ~ 40V	700mA	85	0.95	130*40*30
ETL25-42-C0A60	90 ~ 264Vac	42V	35 ~ 45V	600mA	85	0.95	130*40*30
ETL25-42-C0A55	90 ~ 264Vac	42V	35 ~ 45V	550mA	85	0.95	130*40*30



LED DRIVER 電源驅動器

INDOOR SERIES 室內有殼系列

30W 系列							
							
Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL30-12-C2A50	90 ~ 264Vac	16V	8 ~ 12V	2500mA	85	0.95	135*48*33
ETL30-18-C1A67	90 ~ 264Vac	16V	10 ~ 18V	1670mA	85	0.95	135*48*33
ETL30-24-C1A25	90 ~ 264Vac	33V	12 ~ 24V	1250mA	85	0.95	135*48*33
ETL30-30-C1A0	90 ~ 264Vac	22V	20 ~ 30V	1000mA	85	0.95	135*48*33
ETL30-48-C0A7	90 ~ 264Vac	22V	30 ~ 45V	700mA	85	0.95	135*48*33
80W ~ 100W 系列							
							
Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL80-30-C3A0	90 ~ 264Vac	30V	26 ~ 36V	3000mA	85	0.95	170*68*40
ETL80-36-C2A40	90 ~ 264Vac	33V	26 ~ 36V	2400mA	85	0.95	170*68*40
ETL80-42-C2A0	90 ~ 264Vac	42V	35 ~ 45V	2000mA	85	0.95	170*68*40
ETL100-24-C4A2	90 ~ 264Vac	24V	20 ~ 25V	4200mA	85	0.95	170*68*40
ETL100-36-C2A8	90 ~ 264Vac	33V	26 ~ 36V	2800mA	85	0.95	170*68*40
ETL100-40-C2A5	90 ~ 264Vac	40V	35 ~ 45V	2500mA	85	0.95	170*68*40
ETL100-50-C2A0	90 ~ 264Vac	40V	45 ~ 60V	2000mA	85	0.95	170*68*40
130W 系列							
							
Model 產品型號	Input Voltage 輸入電壓	Output Voltage 輸出電壓	Voltage Range 電壓範圍	Output Current 輸出電流	Efficiency 效率	Power Factor 功率因數	L*W*H (mm) 產品尺寸
ETL130-30-C4A3	90 ~ 264Vac	30V	25 ~ 35V	4300mA	90	0.95	230*68*40
ETL130-36-C3A6	90 ~ 264Vac	36V	30 ~ 40V	3600mA	90	0.95	230*68*40
ETL130-42-C3A0	90 ~ 264Vac	42V	35 ~ 45V	3000mA	90	0.95	230*68*40
ETL130-48-C2A7	90 ~ 264Vac	48V	45 ~ 55V	2700mA	90	0.95	230*68*40